

HYCON HWP2 SUBMERSIBLE PUMPS

IDEAL FOR SMALL MANHOLES AND TIGHT SPACES

HANDLES DIRTY WATER AND SOLIDS



PRODUCT FEATURES

Although small and light, the HWP2 pump can pump up to 35 m³/h. The outside diameter is only 23.8 cm making it ideal for small manholes where the space is tight.

The pump is unaffected by dirty water and solids. In utility


and construction, heavy-duty pumps are necessary to secure no downtime at the job site. The direct drive motor ensures an all-day, everyday operation without damage to the engine or the seals if the pump runs dry.

HYDRAULIC SUBMERSIBLE PUMP HWP2

Item no.	3030002
10 m discharge hose with couplings	4032697
Weight [kg / lbs]	7.7 / 17
Dimensions L x W x H [mm / inch]	235 x 183 x 363 / 9.3 x 7.2 x 14.3
Oil flow [LPM / GPM]	20 - 30 / 5 - 8
Max pressure [bar / psi]	172 / 2500
Max flow capacity [m ³ /h / GPM]	35 / 154
Max head [m / ft]	30 / 98
Max size of solid particles Ø [mm / inch]	38 / 1.5
Outlet size and connection, female thread	BSP 2"

PLEASE NOTE: Discharge Hose is not included.

HYCON HWP2 PERFORMANCE CURVE

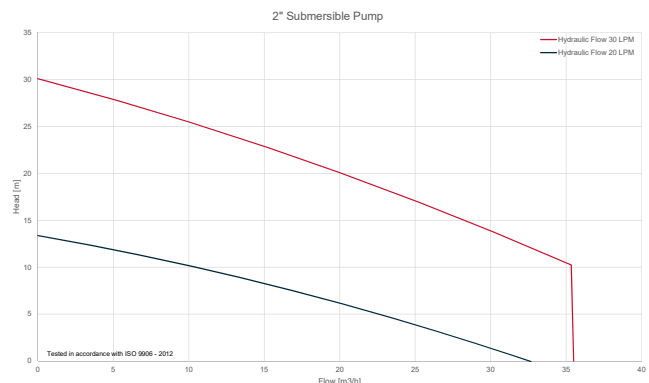

THE HYCON PRODUCT RANGE

CUT-OFF AND RING SAWS · CORE DRILLS · POST DRIVERS · PICK HAMMER · LIGHT & HEAVY DUTY BREAKERS
SUBMERSIBLE PUMPS · ROCK DRILLS · UNDERWATER EQUIPMENT · GASOLINE, DIESEL AND ELECTRIC POWER PACKS



HYCON A/S
Juelstrupparken 11
DK-9530 Støvring

Tel.: +45 9647 5200
Mail: hycon@hycon.dk
www.hycon.dk

DISTRIBUTOR: